

### Product Technical Parameters

Input Voltage: 110-264VAC

Working Current: 700mA

Working Temperature:-10℃-50℃

Storage Temperature:-20℃-70℃

### User Instructions

- ① Fix the mounting sling or mounting bracket with the product and put it on top of the fish tank.
- ② Before connecting, the light switch button should be turned off. When plug in the power cord, all lights will lit up and then go out.
- ③ You can use the remote control to adjust and set the lights according to your needs.
- ④ Please use the original configuration parts and do not change them arbitrarily.
- ⑤ Suggest that the light body especially the emitting surface should be wiped every two weeks with a soft cloth to prevent salt crystals from covering the lens.

### Attention:

1. Indoor use only.
2. No water-proof. Avoid any dripping or splashing water to protect light from damage.
3. DO not hit the product when it is working.
4. Please use the product in well-ventilated environment to ensure its better performance.
5. Do not look at the light directly without wearing sunglasses when it is working.

Products have passed strict quality tests


2014年6月1日



ISO9001:2008  
NO.129593



## Remote Control Instruction / Function Description

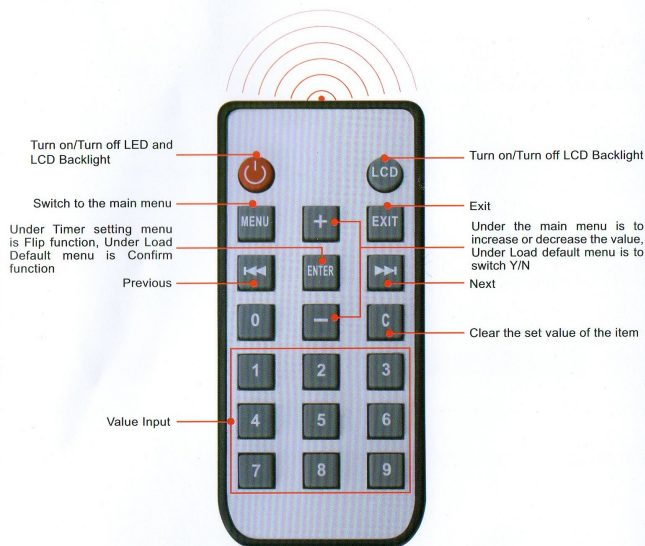

### Function Description

1. When turn on the light, all lights will lit up and then go out, the brightness value is increasing to the set value by each second
2. Set the time in timer setting menu, when Exit, time will automatically stay in order from low value to higher value. The set mode will repeat automatically every day
3. Select season mode from season setting menu, set the light value of the current season from timer setting menu
4. Light value can be defaulted for different seasons, you can quickly switch the light settings from season setting menu.

## LCD Introductions/three use steps

07/31/2013 01:06  
W:38B:38C:29M:38

Main Interface  
Showing the current time  
Brightness value of the 4 dimming channels

Time Setting  
07/31/2013 01:07

**Step 1: Time setting**  
Press 'MENU' and go to "Time Setting"  
Press '▶' or '◀' to choose setting item and then press '+' or '-' or value directly to set the date and time

Season Setting  
Mode: Spring >>

Indicates selected mode

Spring Summer\*  
Autumn Winter >

**Step 2: Season setting**  
Press 'MENU' and go to "Season Setting"  
Press '+' or '-' to choose setting mode from: Spring/Summer/Autumn/Winter/Customize

Timer setting  
Timer Setting  
Mode: Winter

Y turn on/N turn off the timer Settings Time setting

Timer: 01:07 01:09  
W:11B:11C:13M:19

**Step 3: Timer setting**  
Press 'MENU' and go to "Timer setting" and it indicates the currently selected season mode, press '▶' or '◀' to select the default channel, press '+' or '-' or value directly to set the brightness value(0-99), press 'enter' to go to next timer setting, illumination time point can be set up nine groups.

The brightness values of the 4 channels

Lighting Skim  
W:11B:11C:13M:19

The brightness values of the 4 channels

**Lighting preview function**  
Press 'MENU' and go to "Lighting Skim"  
Press '▶' or '◀' Choose channel, press '+' or '-' or value directly to set the brightness value(0-99), then you can preview the glowing effect

Load default  
Setting >>

**Reset Load default function**  
Load Default  
Reset load default, all the data set back to factory default

Reset all data  
Are you sure: Y